



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778
WEBSITE www.gammontech.com
STORE www.gammontechstore.com

**DEADMAN
AND WATER
CONTROLS**


**BULLETIN 67
(02-24)**

DEADMAN AND WATER CONTROL SYSTEMS

DEADMAN HANDLE AND CORD




DEADMAN CONTROL SYSTEM

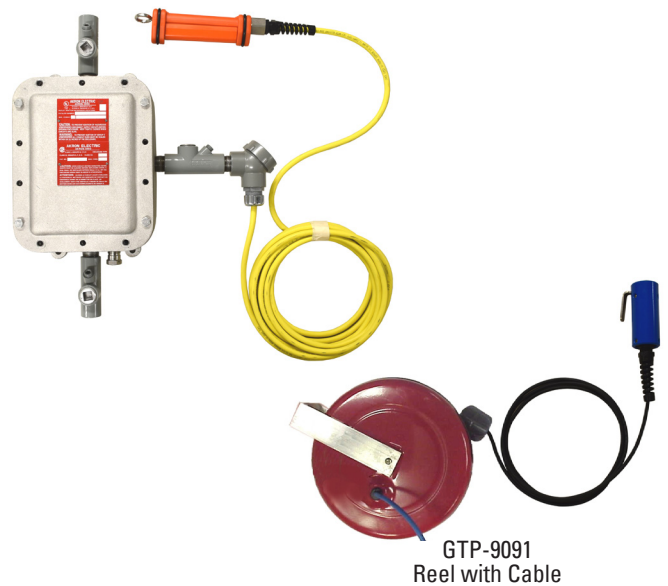

WATER CONTROL SYSTEM



COMBINATION DEADMAN AND WATER CONTROL SYSTEM

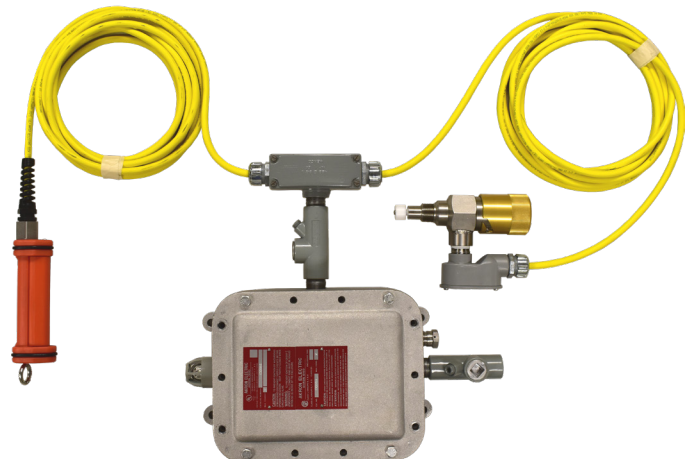

MINI-DEADMAN™

- Made in USA
- Material: urethane
- Dimensions: 4" x 1 3/4"
- Weight: 6 oz.
- Durable
- Compact
- Inexpensive
- Easy to repair
- Wear resistant
- Stainless steel trigger
- Good from -55° to 180°F
- Low operating force required
- Easy to assemble/disassemble
- Can be hung on trigger for storage
- Designed for the aviation environment
- Compatible with any deadman system
- Body screws are recessed to prevent damage



HOW TO ORDER

GTP-8392B Electric Mini-Deadman Handle
GTP-8676 Pneumatic Mini-Deadman Handle
GTP-8676-H Hydraulic Mini-Deadman Handle

NOTE: These handles are not suitable for AC applications unless an intrinsically safe barrier/relay is used.


The heart of any deadman is the switch. The switch in this deadman has a built-in rolling diaphragm seal, aluminum body (not glass, rubber, or plastic), and an 8 amp contact rating. It is hermetically sealed, yet is easily replaceable, incorporating "push on" type electrical connections, eliminating troubles with wire nuts or soldering. In addition, the housing is o-ring sealed and has an anodized aluminum switch carrier and cable base fitting. The strain relief is a spiral type with a watertight seal.

DURA-DEADMAN HANDLE

Solid, super durable, cold molded, and virtually unbreakable, this handle is made of pure polyurethane. This new Dura-Deadman handle is the strongest and most reliable deadman we offer. It was tested for over half a million cycles, we've driven over it with trucks, and it's been dragged on pavement - all without failure. It features replaceable polyurethane drag bosses for even longer life. Made in USA.

ELECTRIC

GTP-9720-E Handle only - no cable
GTP-9720-11E Replacement switch
GTP-9720-21 Replacement pair of drag bosses

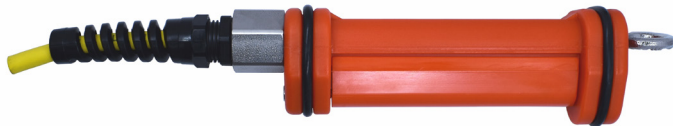

These handles are weather-tight sealed. They are not suitable for AC applications unless an intrinsically safe barrier/relay is used.

Switch data: Normally open switches are standard. Add "-NC" to the part number for normally closed.

PNEUMATIC/HYDRAULIC

GTP-9720-A Pneumatic 3-way valves
GTP-9720-H Hydraulic 2-way valves
GTP-9720-21 Replacement pair of drag bosses



These handles each contain two valves to provide fast reaction time. Seals are Buna/Nitrile.

HOW TO ORDER CABLE WITH ANY ELECTRIC DEADMAN HANDLE

Suffix number for the handle you want - "X" is for straight cable - length in feet (up to 500 ft)
"Z" is for coil cable - length in feet (25 ft or 50 ft)

Example: If you want a Mini Deadman handle with 50' of straight cable, you order a GTP-8392B-X-50.

HOW TO ORDER CABLE SEPARATELY



Yellow straight cable
Sold by the foot
GTP-8521



25' length
JM-8523

Orange coil cable
50' length
JM-8522-1

GAMMON ONE-CC™ WATER PROBE - MEETS EI-1596

DETECTS WATER IN FILTER SEPARATOR SUMPS
ALLOWS PERIODIC TESTING REQUIRING ONLY 1cc OF WATER, EVEN DURING REFUELING
THOUSANDS IN SERVICE WORLD-WIDE

The problem with water detector probes has always been that others are impossible to test periodically without stopping flow, dismantling, or injecting water into the vessel. People are afraid that too much water may be injected. The One-CC Probe solves this simply. First, it has a patented design that only needs 1 ml (1cc) of water for a complete test. Second, it has a built-in water pump, and this pump is only capable of injecting 1 ml (1 cc) of water.




The One-CC™ Water Detector Probe is designed for use in any intrinsically safe electronic control system sensitive enough to detect water by conductivity/resistance. This new probe can therefore replace existing probes in Meggitt/Whittaker equipment if they utilize our replacement controls.

We offer electronic controls in DC, AC, weather tight and explosion proof versions.

- Pressures to 300 psi
- Stainless Steel Construction
- Available with 3/4" NPT or 1 1/2" NPT male connection
- Manual available on our website with test procedure
- US Patent No. 7523645

HOW TO ORDER

GTP-9330-1 3/4" NPT
GTP-9330-1A 1 1/2" NPT

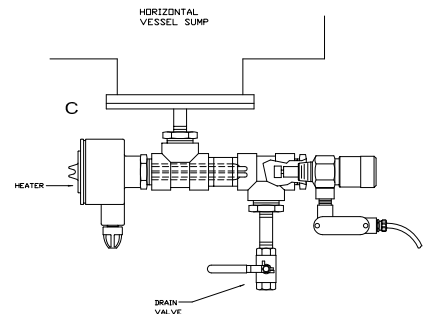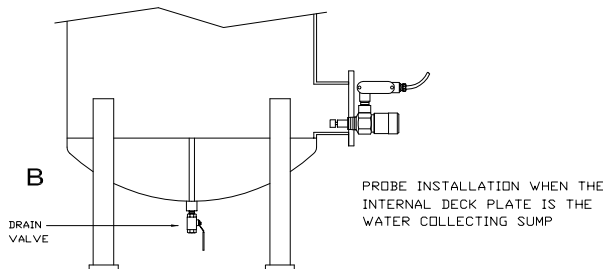

BASIC WATER PROBE LOWER PRICE - INCLUDES CIRCUIT TESTER



For those who prefer a smaller and less expensive water probe. All-stainless construction. Push button circuit tester. Can be fitted to a simple valved drain line assembly which allows for true water testing to EI1596. 3/4" NPT or BSPT connections.

GTP-9734-N 3/4" NPT

GTP-9734-B 3/4" BSPT

DEADMAN HOSE: BOTH HOSES HAVE NEOPRENE CONSTRUCTION, BUNA-N TUBES

Manufactured to Gammon Technical Products, Inc. specifications, this hose is superior to any available air Deadman hose on the market. It is suitable for all refueling operations.


The tubes are made out of Buna-N (nitrile rubber) to resist fuel from cross-leakage in the control system. The braided, reinforced tubes have neoprene covers to resist oils that contaminate ramp areas. A special additive is included to give the cover superior resistance to cracking.

Order model GTP-1202. Available in cut lengths or reels, with or without fittings. For more information, see Bulletin 78.



Operating pressure: 200 psi
Burst pressure: over 800 psi

GTP-1750 -3-1-2-1-1-2-3-5-25. THIS MODEL NUMBER DESCRIBES A SINGLE STAGE WATER DETECTION SYSTEM WITH A DEADMAN HANDLE. THE FOLLOWING FEATURES APPLY: 120 VAC, EXPLOSION PROOF, UL LISTED, AND HAS A MINI DEADMAN HANDLE WITH STRAIGHT CORD, NO REEL; WATER DETECTION PROBE IS STANDARD One-CC WITH 3/4 IN. NPT THREADS AND DEADMAN CORD LENGTH OF 25 FT.

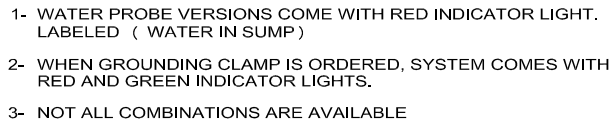

IF YOU ARE USING FUELS THAT CONTAIN THE ADDITIVE AND ARE NOT 100% CONFIDENT IN YOUR PERSONNEL
SUMPING ALL WATER ON A DAILY BASIS, WE SUGGEST YOU USE EITHER A MASS SENSOR OR A FLOAT
TYPE DETECTOR.